

DISHWASHER

RVDW324 – 24" WIDE DISHWASHER



Multi-Level Power Wash

- Multi-level washing with two stainless steel wash arms
 - Largest and most powerful in industry
 - **Exclusive** – Flexible-Fluid™ Coupling is blockproof and provides a direct water feed
- DishGuard™ Protector prevents blockage from lower rack load and protects dishes
- Sliding detergent/rinse agent dispenser

Five-Stage Filtration and Waste


- **Exclusive** – Removal System
- Prevents redeposit of food particles to deliver spot-free dishes
- Removable coarse strainer
- Triple-Clean™ Filtration
 - Horizontal stainless steel fine mesh filter with 18 full-force, self-cleaning jets
 - Vertical stainless steel ultra-fine mesh filter
 - Small filter in sump assures 100% filtered water to wash arms
- Ultra-hard food waste disposer

Sure-Temp™ Water Heating

- Automatically heats water to appropriate/selected temperature, assuring excellent washing results
- 1,200-watt HydroFlo™ Water Heater

Condensate Quick Dry

- Moisture condensates on the cooler stainless steel tank and door then drains to the sump area
- Quick and efficient drying

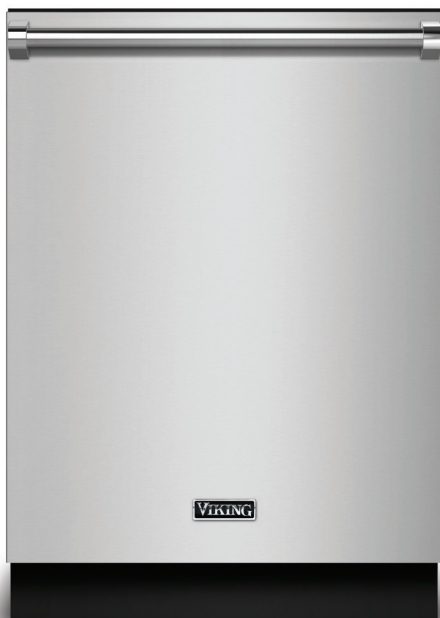

24" Wide Dishwasher

Quiet Clean™ Performance Package – 50dB

- Engineered top to bottom for the quietest operation possible
- Separate motor/pump assemblies for washing and draining
- Sound absorbing/heat retaining insulation

"Load-As-You-Like" Sturdi-Bilt™ Racks

- Heavy-duty racks accommodate 15 international place settings
- Fully usable and extendable nylon-coated racks
- One-piece silverware/cutlery basket with lids
- Lower rack
 - Four rows of one-piece, three-position, fold-down tines
- Roller Bearing™ Upper Rack
 - **Exclusive** – Three rows of multi-position Hold-Tight™ Dividers
 - One-piece stemware cradle/cup shelf

Additional Construction and Safety Features

- **Exclusive** – Diamond-Brite™ Stainless Steel Tank and Inner Door – brightly polished to protect long-term appearance
- Largest dishwasher tank/door
- Rigid steel braces
- Completely enclosed rustproof steel base/pan with removable front
- Fill and drain system
 - Fill valve
 - Backflow prevention valve
 - Overflow protector in base pan
- Door triple safety system – mechanical latch, electrical safety switch, and start button

Cycles/Options

- Cycles – Pots/Pans, Normal Wash, Light/China, Rinse/Hold
- Options – Hi Temp Wash, Sanitized 155 Degrees F Rinse, Delay Start up to 4 hours
- Energy Star Qualified
- CEE Tier I Super Efficient
- NSF Certified

Finishes

- Available in Stainless Steel (SS), Black (BK), and White (WH)



Warranty Highlights

- Three-year full – complete product
- Ninety-day full – cosmetic parts such as glass, painted items, and decorative items
- Lifetime limited – tank and inner door
- Five-year limited – electronic controls, racks, motor/pump assemblies, and water distribution system



DESCRIPTION	24" WIDE DISHWASHER
	RVDW324
Overall Width	23 9/16" (59.8 cm)
Overall Height from Floor	33 7/8" (86.0 cm) minimum to 35" (89.0 cm) maximum
Overall Depth from rear With Door Panel Installed	23 5/8" (60.0 cm) With door open – 49" (124.5 cm)
Cutout Width	24" (61.0 cm)
Cutout Height	34" (86.4 cm) minimum to 35" (89.0 cm) maximum
Cutout Depth	24" (61.0 cm)
Electrical Requirements	15.0 amps, 120V/60Hz, 3'9" (1.1m) electrical cord with 90-degree, 3-prong plug supplied with unit
Water Heating Element Rating	1,200 watts
Inlet Water Temperature	120° F (49° C) recommended; 5' braided stainless steel hose with 3/8" OD compression fitting supplied with unit
Drain Hose	7' (2.1 m), 1/2" (1.3 cm) ID "crimp-proof" flexible drain hose with clamp attached to dishwasher; connections provided for 5/8" (1.6 cm), 3/4" (1.9 cm), or 1" (2.5 cm), cut as required
Drain Hose High Loop Required	Height from floor – 20" (51.0 cm) minimum
Approximate Shipping Weight	147 lb. (66.2 kg)



Viking Range, LLC | 1-888-845-4641 or 662-455-1200

For detailed product information, model numbers, or to request a quote visit vikingrange.com

© 2013 Viking Range, LLC | Specifications subject to change without notice.

